


BB-2590/U Battery

Lithium Ion

- High performance rechargeable Lithium Ion battery with instantaneous start up.
- Dual state of charge “gas gauge” lcd displays.
- Durable high impact plastic housing and connector enclosure.
- High capacity, performance verified, hermetically sealed, lithium-ion cells.
- Protection against short circuit and improper charge.

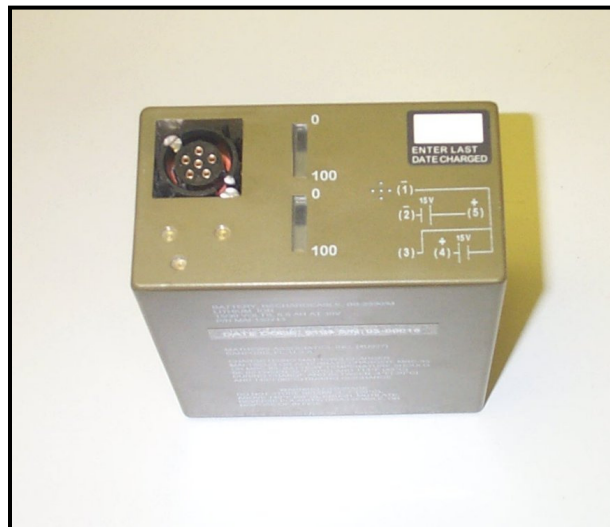

This battery meets the requirements of MIL-PRF-32052 for:

Battery voltage

- Cycle life
- Immersion
- Mechanical and thermal shock
- Vibration, Insulation resistance, High rate discharge, Low temp. discharge
- Full capacity discharge

For use in	PRC-104, PRC-119, Singgars, PRC-138, KY-57 and other equipment
Replacement for	BB-390A/U, BB-390B/U, BB-490/U, BB-590/U, BA-3590/U, BA-5290/U, BA-5390/U, BA-5590/U
NATO stock number	NSN: 6140-99-676-4908
Cell chemistry	Lithium Ion
Nominal voltage	30 Volts or two 15V sections depending on connection
Typical capacity	7.2Ah @ 30V, 14.4Ah @ 15V
Max discharge	12.0A in 15V mode, 6.0A in 30V mode
Max pulse discharge	36.0A in 15V mode, 18.0A in 30V mode
Nominal dimensions	112 x 63 x 127 mm
Nominal weight	1.36kg
Connector	Equivalent to SC-C-179495
Case material	Modified ABS, drab olive green
Operating temperature	-40°C to +60°C
Shelf Life	Five (5) years under controlled storage.
Disposal	Check with local regulations

Mathews Associates, Inc.
220 Power Court
Sanford FL 32771

Phone: (407) 323-3390 Fax: (407) 323-3115
 Email: sales@maifl.com

