


PS-56A Battery

- High performance non-rechargeable Lithium Manganese Dioxide battery.
- Durable high impact plastic housing and connector enclosure
- High reliability due to all welded construction
- Unit contains safety vented cells

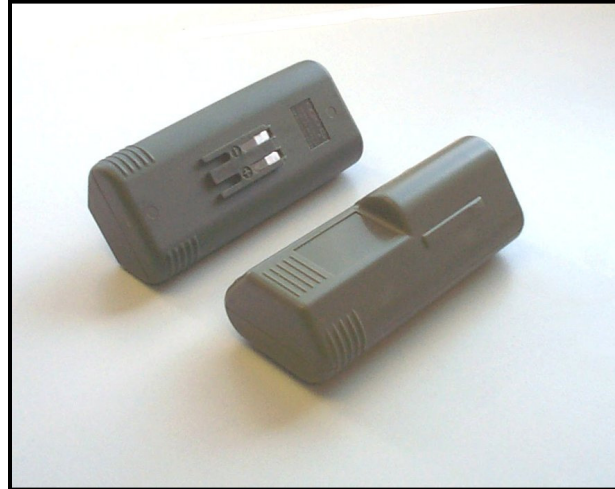

This battery meets the requirements of MIL-B-49471 for:

- Battery voltage
- Capacity test
- Electrolyte leakage
- Mechanical and thermal shock
- Vibration
- Insulation resistance

For use in	Mirabel thermal camera, Sophie thermal night vision equipment
Replacement for	PS-56A, NSN: 6135-14-507-3219
Cell chemistry	Lithium Manganese Dioxide
Nominal voltage	15.0 Volts
Capacity	5.0Ah
Nominal dimensions	145 x 63.5 x 52mm
Weight	470 grams
Connector	2 pin socket
Case material	ABS, Green IR24-5
Operating temperature	-31°C to +55°C
Disposal	Check with local regulations for proper disposal

Mathews Associates, Inc.
220 Power Court
Sanford FL 32771

Phone: (407) 323-3390 Fax: (407) 323-3115
Email: sales@maifl.com



Lithium Manganese Dioxide