


R4516 Battery

- High performance rechargeable Nickel Cadmium battery.
- Durable high impact plastic housing
- High reliability due to all welded construction
- Unit contains safety vented cells

This battery meets the requirements of MIL-PRF-32052 for:

- Battery voltage
- Capacity test
- Electrolyte leakage
- Mechanical and thermal shock
- Vibration
- Insulation resistance

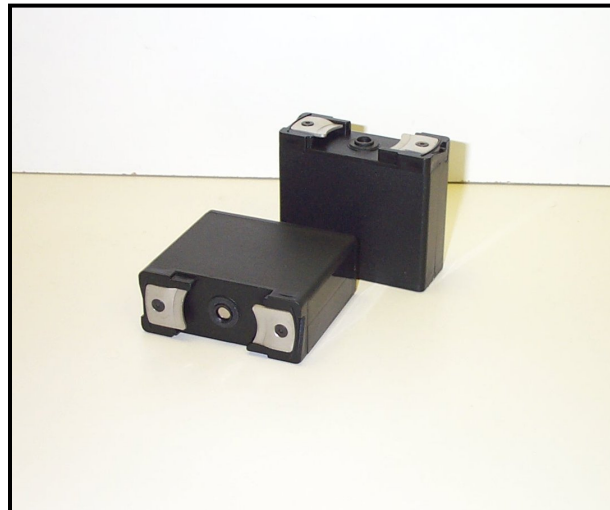

Nickel Cadmium

For use in	PRM-4515 and PRM-4720 Racal Cougar radios
Replacement for	MA-4516/A and MA-4516/W
Cell chemistry	Nickel Cadmium
Nominal voltage	9.6Volts
Typical capacity	1000mAh
Typical service life	500 cycles
Nominal dimensions	68 x 75 x 30mm
Nominal weight	260gms
Connector	Twist lock contacts with water tight O ring around centre contact
Case material	Black high impact engineering plastic
Operating temperature	-20°C to +55°C
Shelf life	Five (5) Years under controlled storage. (+ 4°C, 50% R.H)
Disposal	Battery must be recycled

Mathews Associates, Inc.
220 Power Court
Sanford FL 32771

Phone: (407) 323-3390 Fax: (407) 323-3115
Email: sales@maifl.com

